


aTCA-6900

Dual Quad-Core LV Xeon® 10 Gigabit Ethernet AdvancedTCA® Processor Blade

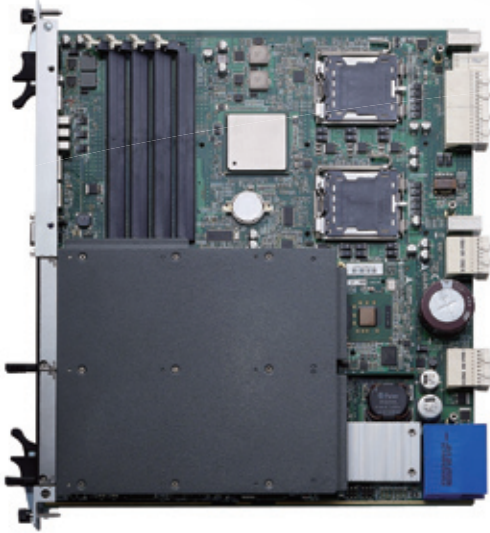

Features

- Two Quad-Core or Dual-Core Intel® LV Xeon® processors
- Intel® EM64T 64-bit Extended Memory Technology
- Dual Channel DDR2-667 REG/ECC with 32 GB maximum capacity
- Intel® 5100/ICH9R chipset
- Dual AMC.0 Mid-size bays
- Dual 10GBASE-KX4/1000BASE-BX Fabric interface channels
- RAID 0/1/10 SATA/SAS ports
- Optional on-board 24-port Gigabit Ethernet Switch-on-Chip

Intel® Ethernet

Specifications

CPU / Chipset / RAM

CPU & FSB	Two Quad-Core Intel® Xeon® L5408 2.13 GHz, FSB 1066 MHz, 12 MB L2 Cache (FC-LGA6) Two Dual-Core Intel® Xeon® 5138 2.13 GHz, FSB 1066 MHz, 4MB L2 Cache (FC-LGA6)
Chipset	Intel® 5100/ICH9R Chipset
RAM	Four DDR2-667 240-pin RDIMM sockets, up to 32 GB

BIOS

Chip	AMI BIOS on SPI flash memory
Features	Intel® PXE pre-boot Remote Console

I/O Interfaces

Graphics	ATI ES1000 with 64 MB VRAM, up to UXGA 1600 x 1200 resolution
AMC	AMC1: AMC.0 Midsize, AMC.1 Type4, AMC.2 E2/Type3, AMC.3 S2 AMC2: AMC.0 Midsize, AMC.1 Type1, AMC.2 E2/Type3, AMC.3 S2
Ethernet	Dual 10/100/1000BASE-T Base interface channels Dual 10GBASE-KX4/1000BASE-BX Fabric interface channels Dual 10/100/1000BASE-T Egress ports Optional on-board 24-port Gigabit Ethernet Switch-on-Chip
Storage	Dual AMC.3 SATA-II ports (Port2) Dual AMC.3 SAS ports (Port3) On-board bootable 4 GB USB flash memory
USB	Three USB 2.0 ports
Front Panel I/O	AMC1/2, VGA, USB1/2/3, LAN1/2, COM1

PICMG Standard

AdvancedTCA	PICMG® 3.0 R2.0 ECN001 PICMG® 3.1 Ethernet Over PICMG 3.0 R1.0 , Option1/9
AdvancedMC	PICMG® AMC.0: Advanced Mezzanine Card Specification R2.0 PICMG® AMC.1: PCI Express and Advanced Switching R1.0 PICMG® AMC.2: Gigabit Ethernet R1.0 PICMG® AMC.3: Storage Interfaces R1.0

Other features

Operating System	Windows® XP Professional, Windows® Server 2003, Fedora™ 8 and 9, Red Hat Enterprise Linux® 5.2
------------------	--

Mechanical and Environmental

Form Factor	PICMG 3.0 R2.0 ECN001 AdvancedTCA
Dimensions	322.25mm x 280mm x 6HP (L x W x H)
Weight	2.8 kg / 6 lb
Operating Temp.	0°C to 50°C
Storage Temp.	-20°C to 80°C
Humidity	5% to 95%, non-condensed
Shock	15G peak-to-peak, 11ms duration, non-operation
Vibration	Non-operation: 1.88Grms, 5-500Hz each axis Operation: 0.5Grms, 5-500Hz each axis
Power Consumption	168W (Dual Quad-Core Intel® Xeon® L5408 with 100% CPU Usage)
Certifications	FCC, CE, CUL, NEBS Level 3 (design)

Ordering Information

Modules

Model Number	Description/Configuration
aTCA-6900/D5138	Two LV-5138 Dual-Core 2.13GHz Xeon® 10GbE processor blade
aTCA-6900/D5408	Two L5408 Quad-Core 2.13GHz Xeon® 10GbE processor blade
aTCA-6900S/D5138	Two LV-5138 Dual-Core 2.13GHz Xeon® 10GbE processor blade w/ switch
aTCA-6900S/D5408	Two L5408 Quad-Core 2.13GHz Xeon® 10GbE processor blade w/ switch
AMC-7000/SATA250G	Mid-size SATA-150 250GB AMC HDD module
AMC-7100/146G	Mid-size SAS 146GB AMC HDD module

