


cPCI-6870 Series

6U CompactPCI® Intel® Core™2 Duo
Universal Blade with two PMC/XMC sites

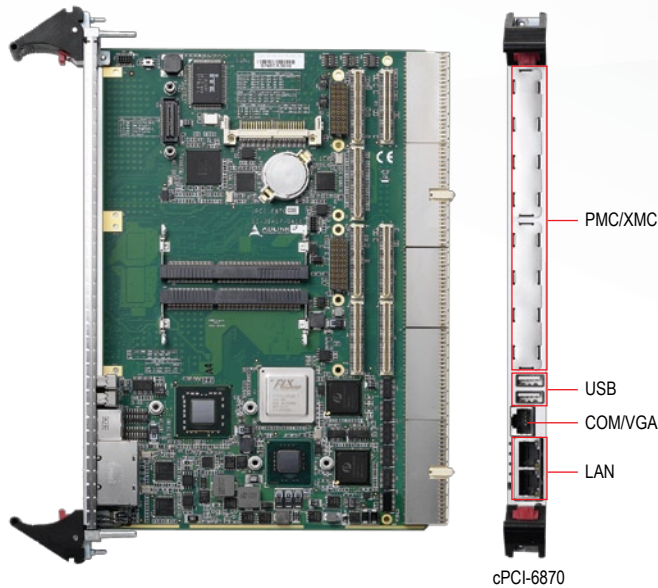

Features

- Intel® Core™2 Duo SV, LV, ULV processors, up to 2.26GHz
- Up to 8GB DDR3-1066 memory
- Two 64-bit/133MHz PMC sites or
- Two PCI-Express x8 XMC sites
- Supports system/peripheral universal mode

**EXTENDED
TEMPERATURE**

Specifications

Processor & System

CPU	<p>µFC-BGA Intel® Core™2 Duo Processor SP9300 2.26GHz, 6MB L2, FSB 1066MHz, TDP 25W</p> <p>µFC-BGA LV Intel® Core™2 Duo Processor SL9400 1.86GHz, 6MB L2, FSB 1066MHz, TDP 17W</p> <p>µFC-BGA ULV Intel® Core™2 Duo Processor SU9300 1.2GHz, 3MB L2, FSB 800MHz, TDP 10W</p> <p>µFC-BGA Intel® Celeron® Processor ULV 723 1.2GHz, 1MB L2, FSB 800MHz, TDP 10W</p>
Chipset	Intel® GS45 with ICH9M-SFF
RAM	Dual channel DDR3-800/1066 SDRAM with two SO-DIMM sockets, up to 8GB capacity
BIOS	AMI® BIOS, dual 16Mbit SPI Flash memory
CompactPCI Bus	PCI 64-bit/66MHz, 3.3V or 5V universal V (I/O)
	Supports operation in system and peripheral slots with CompactPCI® bus communication (Universal mode)
Standard	<p>PICMG® 2.0 CompactPCI R3.0</p> <p>PICMG® 2.1 Hot Swap R2.0</p> <p>PICMG® 2.9 System Management R1.0</p> <p>PICMG® 2.16 Packet Switching Backplane R1.0</p>

Connectivity

PMC/XMC	Two PCI 64-bit/133MHz PMC sites or two PCI-Express x8 XMC sites
Ethernet	<p>Four PCI-Express Intel® 82574L Gigabit Ethernet controllers</p> <p>Two 10/100/1000BASE-T front panel ports</p> <p>Two 10/100/1000BASE-T PICMG® 2.16 ports</p> <p>Two additional 10/100/1000BASE-T ports on RTM cPCI-R6100</p>
Graphics	<p>Integrated in Intel® GS45, powered by Gen-5.0 Graphics Architecture</p> <p>Analog CRT signal to rear by default (switchable to front)</p> <p>VGA port on front panel via RJ-45 to DB-15 adapter cable (shared with RJ-45 COM port)</p> <p>Analog monitor support up to QXGA</p>
USB	<p>Two USB 2.0 front panel ports</p> <p>Six USB ports routed to RTM</p>
PS/2	PS/2 Keyboard Mouse port routed to rear
Serial Port	<p>Up to three 16C550 compatible serial ports from Super IO</p> <p>One RJ45 port on front panel (shared with VGA)</p> <p>Two serial ports routed to rear</p>
Audio	High Definition Audio signals routed to rear

Storage

SBC	<p>One removable Serial ATA direct connector for 2.5" onboard HDD, occupies outer PMC site</p> <p>CompactFlash socket onboard</p>
RTM*	<p>Up to 2 SATA ports</p> <p>CF (x1) and SD (x1) sockets</p> <p>One internal and one external 68-pin SCSI connector by LSI53C1020 SCSI Ultra320 controller (RAID 1)</p> <p>Onboard Floppy pin header</p> <p>Eight SAS ports by LSI53C1068E with hardware RAID by two mini SAS x4 connectors</p> <p>*Available interfaces dependent on RTM model selected</p>

Operating System

OS	<p>Microsoft Windows® XP Professional</p> <p>Microsoft Windows® Vista x64 Edition</p> <p>RedHat Enterprise Linux 5.1</p> <p>Wind River Vxworks 6.7</p> <p>(Please contact ADLINK for other OS support)</p>
----	--

Miscellaneous

LED	Power (green), WDT (red), Hot Swap (blue), Hard Disk (amber)
Battery	Coin cell lithium battery onboard for RTC CMOS RAM
Watchdog Timer	System Reset and NMI, with programmable interval, 1-65535 seconds or minutes
Hardware Monitor	Monitors CPU temperature, system temperature, Vcore and DC voltages

Mechanical & Environmental

Form Factor	6U 4HP CompactPCI®	
Operating Temperature	0°C to +60°C standard	
	-20°C to +70°C extended temperature (optional)	
Storage Temperature	-40°C to +85°C	
RH Humidity	95% non-condensing	
Shock	15G peak-to-peak, 11ms duration, non-operating	
Vibration	1.88 Grms random vibration, 5-500Hz, each axis, operating	
Power Consumption	Intel® Core™2 Duo SP300, 2GB DDR3-1066, 80GB SAS onboard HDD under Windows® XP with 100% CPU loading	
	Current (A)	Power (W)
	5V	6 30
	3.3V	3.59 11.85
	Total	41.85

Safety & EMI

Certification	CE/ FCC
---------------	---------

I/O Table

		GbE	USB 2.0	COM	DVI	VGA	PMC/XMC	SATA	SCSI	CF	Mic-in	Line-out	PS/2 KB/MS	FDD	SD	SAS
SBC																
cPCI-6870	Faceplate	2	2	1 (RJ-45)		1 ⁽¹⁾ (RJ-45)										
	Onboard						2	1 ⁽²⁾		1						
RTM																
cPCI-R6001	Faceplate	2	2	1 (DB-9)		1			1							
	Onboard		1 (5-pin)	1 ⁽³⁾ (10-pin)				1 (7-pin)	1					1		
cPCI-R6001D	Faceplate	2	4	1 (DB-9)		1			1		1	1	1			
	Onboard		1 (5-pin)	1 ⁽³⁾ (10-pin)				2 ⁽⁴⁾	1	1 (optional) ⁽⁴⁾				1		
cPCI-R6001P	Faceplate	2	2	1 (DB-9)		1										
	Onboard		1 (5-pin)	1 ⁽³⁾ (10-pin)			1 (PIM)	1 (7-pin)						1		
cPCI-R6101	Faceplate	4	4	1 (RJ-45)		1							1			
	Onboard							1 (7-pin)		1 ⁽⁵⁾					1	
cPCI-R6111	Faceplate	2	4			1							1			
	Onboard							1 (for 2.5" HDD)		1 ⁽⁵⁾					1	
cPCI-R6201	Faceplate	2	3	1 (DB-9)		1					1	1	1			4 (SFF-8088)
	Onboard		1 (5-pin)	1 ⁽³⁾ (10-pin)				2 ⁽⁴⁾		1 (optional) ⁽⁴⁾						4 (SFF-8087)

(1) Share the same RJ-45 connector with COM port by RJ-45 to DB-15 adapter cable. COM and VGA cannot be used simultaneously.

(2) For 2.5" HDD direct connection. 2.5" HDD share the same space with outer PMC site and cannot be installed simultaneously.

(3) Tx, Rx signals only

(4) One 7-pin signal connector onboard for external HDD and one direct connector for onboard 2.5" SATA HDD. Optional CompactFlash slot is supported by replacing SATA connector adapter with CompactFlash adapter. SATA HDD and CF cannot be used simultaneously.

(5) Converted from USB

Ordering Information

Model Number	Description/Configuration
CPU Board	
cPCI-6870/SP93/M2G	6U CompactPCI® blade with Core™2 Duo 2.26 GHz (SP9300) processor and 2x 1GB DDR3-1066 SODIMM
cPCI-6870/SP93/M4G	6U CompactPCI® blade with Core™2 Duo 2.26 GHz (SP9300) processor and 2x 2GB DDR3-1066 SODIMM
cPCI-6870/SL94/M2G	6U CompactPCI® blade with Core™2 Duo 1.86 GHz (SL9400) processor and 2x 1GB DDR3-1066 SODIMM
cPCI-6870/SU93/M2G	6U CompactPCI® blade with Core™2 Duo 1.2 GHz (SU9300) processor and 2x 1GB DDR3-1066 SODIMM
cPCI-6870/723/M2G	6U CompactPCI® blade with Celeron® 1.2 GHz (723) processor and 1GB DDR3-1066 SODIMM
Rear Transition Module	
cPCI-R6001	4HP Rear I/O module with GbE x2, COM x2, USB x3, Floppy, SATA, SCSI, VGA
cPCI-R6001D	8HP Rear I/O module with GbE x2, COM x2, USB x5, Floppy, SATA x2, SCSI, VGA, PS/2 and Mic-in, Line-out
cPCI-R6001P	4HP Rear I/O module with GbE x2, COM x2, USB x3, Floppy, SATA, PIM, VGA
cPCI-R6101	4HP Rear I/O module with GbE x4, COM, USB x4, SATA, VGA, PS/2, CF, SD socket
cPCI-R6111	4HP Rear I/O module with GbE x2, USB x4, SATA, VGA, PS/2, CF, SD socket
cPCI-R6201	8HP Rear I/O module with GbE x2, USB x4, VGA, SATA x2, Mic-in, Line-out, PS/2 KB/MS, SAS x8

Mezzanine

DB-CF-SA

CompactFlash socket adapter card (for cPCI-R6001D, cPCI-R6111 and cPCI-R6201)

