

EDA20 SERIES

AC-DC ENCLOSED SWITCHING POWER SUPPLY



FEATURES

- UL / cUL / TUV / CE
- UNIVERSAL INPUT 88~264VAC
- SHORT CIRCUIT PROTECTION
- INTERNAL INPUT FILTER
- 2 YEARS WARRANTY
- HIGH EFFICIENCY UP TO 87%
- HIGH AVERAGE EFFICIENCY MEET EUP
- LOW STANDBY POWER CONSUMPTION



MODEL LIST

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	EFF. (avg.)
Single Output Models							
EDA20-05	88~264 VAC	20 WATTS	+ 5 VDC	4000 mA	81%	83%	80%
EDA20-12	88~264 VAC	20.4 WATTS	+ 12 VDC	1700 mA	84%	86%	83%
EDA20-15	88~264 VAC	21 WATTS	+ 15 VDC	1400 mA	85%	87%	84%
EDA20-24	88~264 VAC	21.6 WATTS	+ 24 VDC	900 mA	85%	87%	84%

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL								
Characteristics	Conditions		min.	typ.	max.	unit		
Switching frequency	Vi nom, Io nom			65		KHz		
Isolation voltage	Input-Output		3000 / 4242			VAC / VDC		
	Input-FG		1500 / 2121			VAC / VDC		
Isolation resistance	Input-Output, @ 500VDC		100			MΩ		
Ambient temperature	Operating at Vi nom		-40		+ 71	°C		
Derating (see derating curve)	Vi nom, from 61°C to +71°C				2.5	% / °C		
Storage temperature	Non operational		-40		+ 85	°C		
Relative humidity	Vi nom, Io nom		20		95	% RH		
Temperature coefficient	Vi nom, Io min				± 0.03	% / °C		
MTBF	Bellcore Issue 6 @40°C, GB		5V model			729000	Hours	
			12V model			740000	Hours	
			15V model			746000	Hours	
			24V model			772000	Hours	
Altitude during operation	IEC 60068-2-13				4850	m		
Dimension					L92 x W54 x D30		mm	
Cooling	Free air convection							

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

INPUT SPECIFICATIONS

Characteristics	Conditions		min.	typ.	max.	unit
Rated input voltage	Io nom		100		240	VAC
Absolute input max. range		AC in	88		264	VAC
		DC in	120		375	VDC
Input current	Vi : 115 / 230 VAC, Io nom			390 / 250		mA
Rated input current	Vi : 88 VAC, Io nom				500	mA
Line frequency	Vi nom, Io nom		47		63	Hz
Inrush current	Vi : 115 / 230 VAC, Io nom				20 / 40	A
Power dissipation	Vi : 230 VAC, Io nom	5V model		4.5		W
		12V model		4		W
		15V model		4		W
		24V model		4		W
Leakage current	Input-Output				0.25	mA
	Input-FG				3.5	mA
Standby power consumption	Vi nom, Io=0A				0.3	W

OUTPUT SPECIFICATIONS

Characteristics	Conditions		min.	typ.	max.	unit
Output voltage accuracy (Adjusted before shipment)	Vi nom, Io max		0		+ 1	%
Minimum load	Vi nom		0			%
Line regulation	Io nom, Vi min ...Vi max				± 0.5	%
Load regulation	Vi nom, Io min ...Io nom				± 1	%
Voltage trim range	Vi nom, 0.8 Io nom	5V model	4.5		5.5	VDC
		12V model	10.8		13.2	VDC
		15V model	13.5		16.5	VDC
		24V model	21.6		27.6	VDC
Rated continuous loading	Vi nom	5V model	4 A @ 5Vdc / 3.6 A @ 5.5 Vdc			
		12V model	1.7 A @ 12Vdc / 1.5 A @ 13.2 Vdc			
		15V model	1.4 A @ 15Vdc / 1.25 A @ 16.5 Vdc			
		24V model	0.9 A @ 24Vdc / 0.75 A @ 27.6 Vdc			
Hold up time	Vi : 115 / 230 VAC, Io nom		15 / 80			ms
Turn on time	Vi nom, Io nom				1000	ms
	Vi nom, Io nom → with 3500 μF CAP				1500	ms
Rise time	Vi nom, Io nom				150	ms
	Vi nom, Io nom → with 3500 μF CAP				500	ms
Fall time	Vi nom, Io nom				150	ms
Transient recovery time	Vi nom, I ~ 0.5 Io nom				2	ms
Ripple & noise	Vi nom, Io nom, BW = 20MHz				100	mV
Power back immunity	Vi nom, Io nom 1 second	5V model	7.5			VDC
		12V model	18			VDC
		15V model	22			VDC
		24V model	35			VDC
Capacitor load	Vi nom, Io nom				3500	μF
Efficiency	Vi nom, Io nom, Po / Pi		Up to 87%, See model list and typ efficiency curve			

CONTROL AND PROTECTION

Characteristics	Conditions	min.	typ.	max.	unit
Input fuse		T2A / 250VAC internal			
Internal surge voltage protection	IEC 61000-4-5	Varistor			
Rated over load protection	Vi nom (see typ current limited curve)	120		160	%

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

CONTROL AND PROTECTION

Characteristics	Conditions		min.	typ.	max.	unit
Over voltage protection	Vi nom, Io nom (Auto Recovery)	5V model	5.75		6.75	VDC
		12V model	13.8		16.2	VDC
		15V model	17.25		20.25	VDC
		24V model	28.8		32.4	VDC
Output short circuit			Hiccup mode			

APPROVALS AND STANDARDS




UL / cUL	UL 60950-1 Recognized
TUV	EN 60950-1, CB scheme
CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024 EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8 EN 61000-4-11, ENV 50204, EN 61204-3
Vibration resistance	meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 Faces, 3 times for each Face)

PHYSICAL CHARACTERISTICS

Case size	92 x 54 x 30 mm (3.62 x 2.13 x 1.18 inches)
Case material	Plastic
Weight	140 g

MECHANISM & PIN CONFIGURATION

mm [inch]

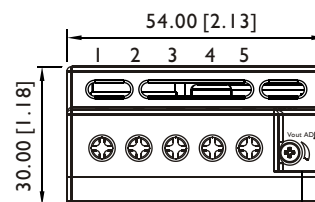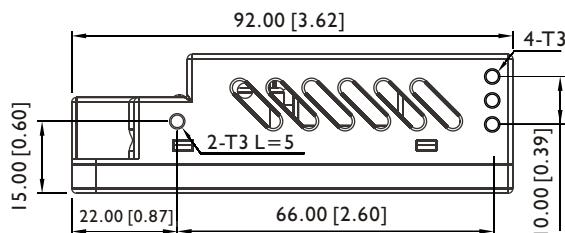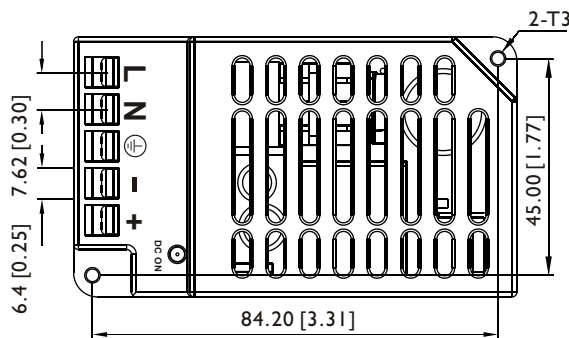

INSTALLATION


Ventilation / Cooling
Normal convection
Connector size range
AWG22-14 (0.2~2mm²) flexible / solid cable,
connector can withstand torque at maximum
8 pound-inches.

GENERAL TOLERANCE	
0.00[0.00] - 30.00[1.18]	±0.30[0.01]
30.00[1.18] - 120.00[4.72]	±0.50[0.02]


PIN ASSIGNMENT

PIN NO.	Designation	Description
1	IN	L
2		N
3		⊕
4	OTHER OUT	-
5		+
		Vout ADJ.
		DC ON


CIRCUIT SCHEMATIC

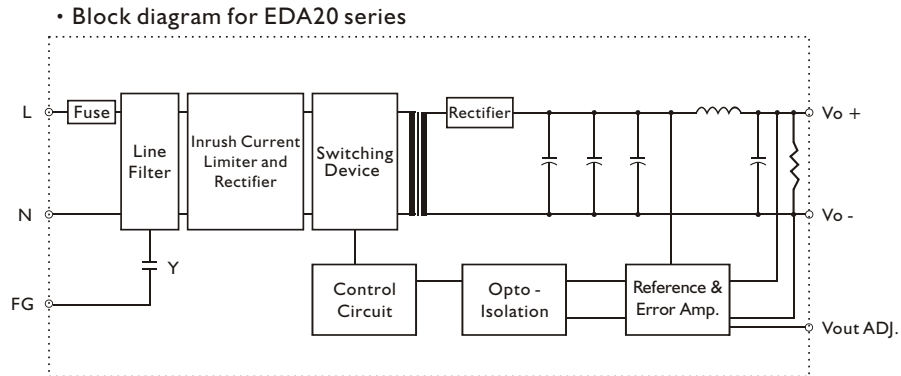

TYP. CURRENT LIMITED CURVE

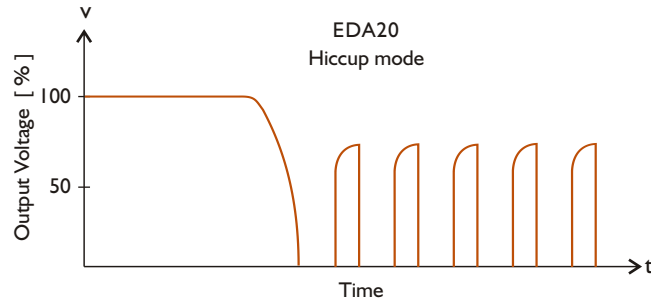

DERATING CURVE

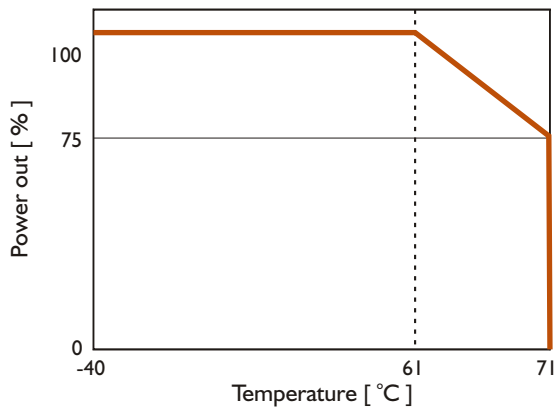

TYP. EFFICIENCY CURVE

