


D-Sub Filter Connectors

Filter connectors with planar filter (FP)



➔ Connector "straight" with planar filter

solder cup

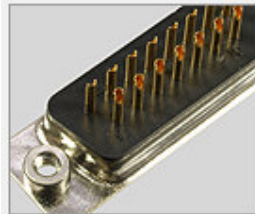

Socket and plug connectors
Solder cup
Suitable for cable AWG 22
High quality machined contacts
in 9, 15, 25 and 37 pin version
Capacity values from 330pF up to 47nF
Front- and backshells tinned or chromated

solder pin



Socket and plug connectors
Solder pin
High quality machined contacts
in 9, 15, 25 and 37 pin version
Capacity values from 330pF up to 47nF
Front- and backshells tinned or chromated

Pressfit technologie



Socket and plug connectors
High quality machined contacts
in 9, 15, 25 and 37 pin version
Capacity values from 330pF up to 6800pF
Front- and backshells tinned or chromated




➔ **Connector "angeld" with planar filter**

Short (7.18 mm)



Socket and plug connectors
Solder pin in 90° A version
Mounting height 6,3 mm
High quality machined contacts
in 9, 15, 25 and 37 pin version
Capacity values from 330pF up to 47nF
Front- and backshells tinned or chromated

Eurostyle (8.4 mm)

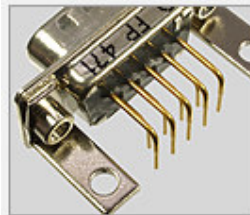

Socket and plug connectors
Solder pin in 90° version
Eurostyle, mounting height 3,6 mm
High quality machined contacts
in 9, 15, 25 and 37 pin version
Capacity values from 330pF up to 47nF
Front- and backshells tinned or chromated



Standard (9.4 mm)




Socket and plug connectors
Solder pin in 90° version
Mounting height 7,4 mm
High quality machined contacts
in 9, 15, 25 and 37 pin version
Capacity values from 330pF up to 47nF
Front- and backshells tinned or chromated

in SMD technology



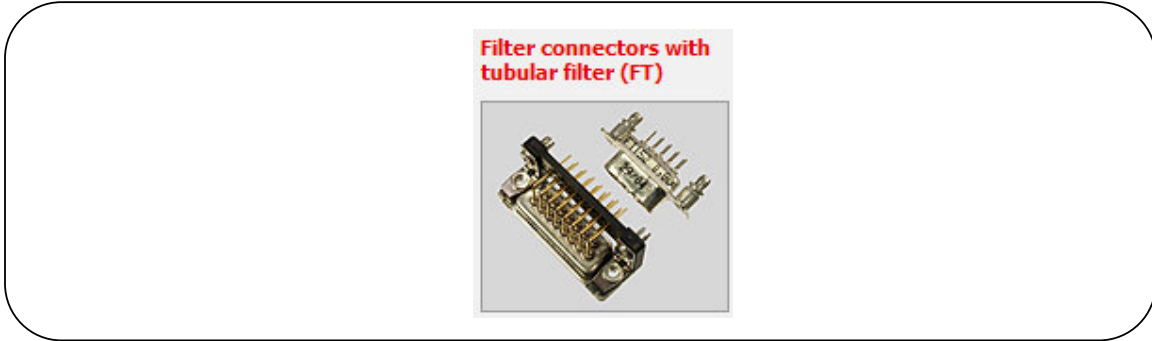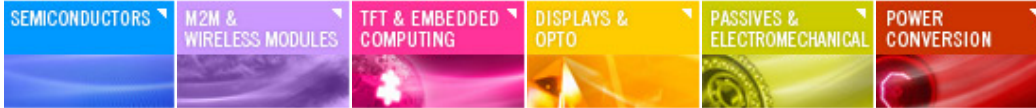

➔ **Connector "straight" with tubular filter**

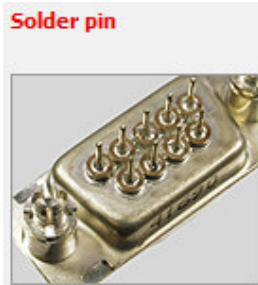

Socket and plug connectors
Solder pin
High quality machined contacts
in 9, 15, 25 and 37 pin version
Capacity values from 330pF up to 1500pF
Front- and backshells tinned or chromated


➔ **Connector "angeld" with tubular filter**



Socket and plug connectors
Solder pin in 90° version
Mounting height 7,4 mm
High quality machined contacts
in 9, 15, 25 and 37 pin version
Capacity values from 330pF up to 1500pF
Front- and backshells tinned or chromated




Socket and plug connectors
Solder pin in 90° A version
Mounting height 6,3 mm
High quality machined contacts
in 9, 15, 25 and 37 pin version
Capacity values from 330pF up to 1500pF
Front- and backshells tinned or chromated

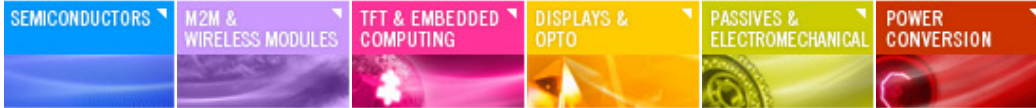


Filter connectors with pi filter (Pi)



Connector with solder pins and PI filter

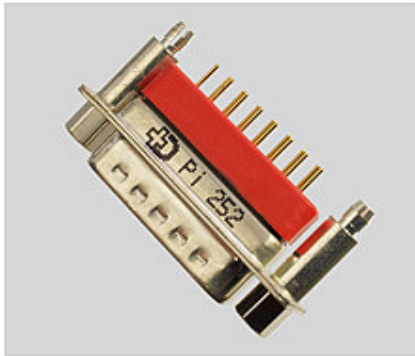

- Socket and plug connectors
- High quality machined contacts
- in 9, 15, 25 and 37 pin version
- Capacity values from 100pF up to 5000pF
- Front- and backshells tinned or chromated

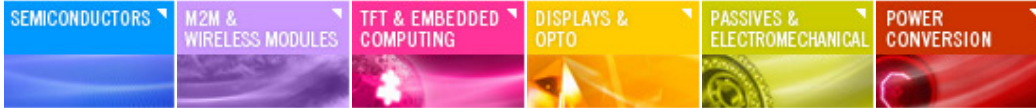

Planar filter adapters (FP)



Adapter with planar filter



- Socket and plug connectors
- High quality machined contacts
- in 9, 15, 25 and 37 pin version
- Capacity values from 330pF up to 6800pF
- Front- and backshells tinned or chromated