

## JetBox 3300-w / 3350i-w


Programmable

### Compact size for small front-end control systems


- Embedded Linux ready for easy maintenance
- Linux SDK for quick time-to-market
- Dual Ethernet ports for system uplink redundancy
- Dual USB for data storage
- 2 Serial, 16 DIO for device and signal control
- 2KV Serial Isolation for device protection
- -40~80°C wide operating temperature for harsh environments



### JetBox 3300-w Interface

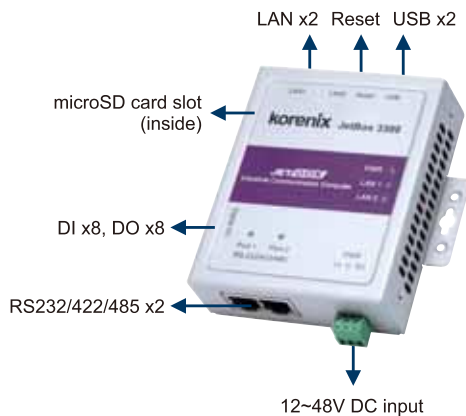

### JetBox 3350i-w Interface

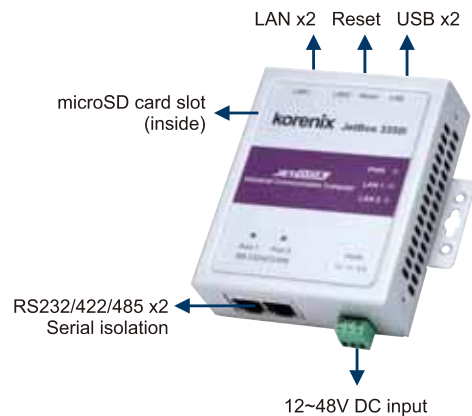

### JetBox 3300-w

#### Linux Computer w/ 16 DIO

- Ethernet x2
- USB x2
- microSD x1
- RS232/422/485 x2
- DI x8, DO x8



### JetBox 3350i-w

#### Linux Computer w/ Isolated Serial

- Ethernet x2
- USB x2
- microSD x1
- RS232/422/485 x2 with 2KV isolation

