

## 1.8V-3.3V PicoPLL™, 3-PLL, 200MHz, 5 Output Clock IC



### FEATURES

- Designed for PCB space savings with 3 low-power Programmable PLLs and up to 5 clock outputs.
- Low-power consumption (<10µA when PDB is activated)
- Output frequency:
  - ≤110MHz @ 1.8V operation
  - ≤166MHz @ 2.5V operation
  - ≤200MHz @ 3.3V operation
- Input frequency:
  - Fundamental Crystal: 10MHz to 40MHz
  - Reference Input: 10MHz to 200MHz
- Programmable I/O pins can be configured as Output Enable (OE), Power Down (PDB) inputs, Configuration Select (CSEL) or Clock outputs.
- Disabled outputs programmable as HiZ or Active Low
- Two distinct configurations selectable with CSEL (MSOP-10L Only)
- Single 1.8V to 3.3V, ± 10% power supply
- Operating temperature range from -40°C to 85°C
- Available in GREEN/RoHS compliant SOP-8L or MSOP-10L packages.

### DESCRIPTION


The PL613-05 is an advanced triple PLL design based on PhaseLink's PicoPLL™, world's smallest programmable clock, technology. This flexible programmable architecture is ideal for high performance, low-power, low-cost applications. When using the power down (PDB) feature the PL613-05 consumes less than 10 µA of power, while its Configuration Select (CSEL) function allows switching of 2 programmable configurations. Besides its small form factor and 3 or 5 outputs that can reduce overall system costs, the PL613-05 offers superior phase noise, jitter and power consumption performance.

### PIN CONFIGURATION

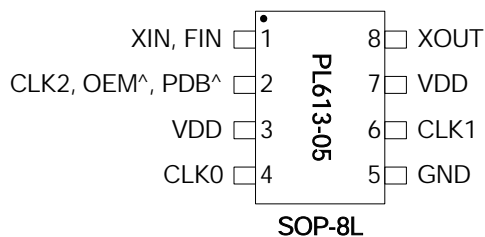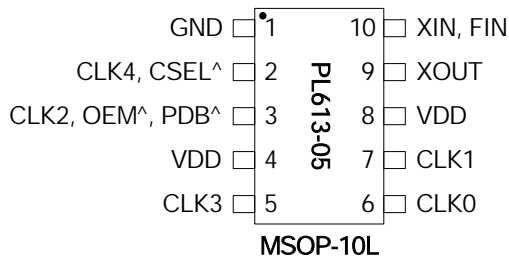

^ Denotes internal pull up

### BLOCK DIAGRAM

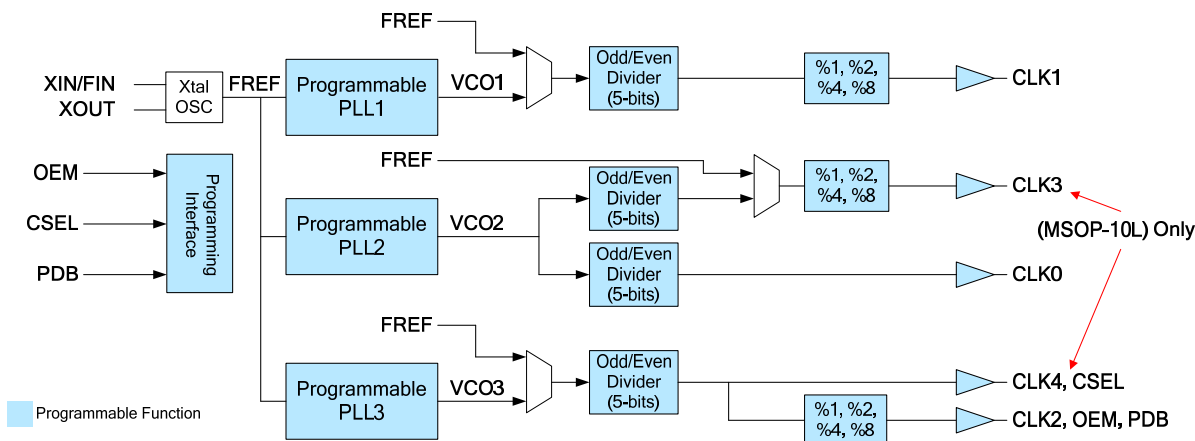

## 1.8V-3.3V PicoPLL™, 3-PLL, 200MHz, 5 Output Clock IC

### PACKAGE PIN ASSIGNMENT

Name	Package Pin #		Type	Description
	MSOP-10L	SOP-8L		
GND	1	5	P	GND connection
CLK4, CSEL	2	-	B*	- Programmable Clock (CLK4) output or - Configuration Switching input
CLK2, OEM, PDB	3	2	B*	- Programmable Clock (CLK2) output, or - Output Enable Master (OEM) for all clock outputs, or - Power Down mode (PDB) input
VDD	4, 8	3, 7	P	VDD connection
CLK3	5	-	O	Programmable Clock (CLK3) output
CLK0	6	4	B*	Programmable Clock (CLK0) output
CLK1	7	6	O	Programmable Clock (CLK1) output
XOUT	9	8	O	Crystal output pin. Do Not Connect when using FIN
XIN, FIN	10	1	I	Crystal or Reference Clock input

\* **Note:** All bidirectional buffers (I/Os) incorporate an internal 60KΩ pull up resistor except when PDB mode is used. In configurations that use PDB, the PDB pin will have a 10MΩ pull up resistor.

### KEY PROGRAMMING PARAMETERS

CLK[0:4] Output Frequency	Output Drive Strength	Programmable Input/Output
CLK[0] $F_{VCO2} / P$ CLK[1,2] $F_{VCOx} / (P*(1,2,4,8))$ or $F_{REF} / (P*(1,2,4,8))$ CLK[3] $F_{VCO2} / (P*(1,2,4,8))$ or $F_{REF} / (P*(1,2,4,8))$ CLK[4] $F_{VCO3} / P$ or $F_{REF} / P$ Where $F_{VCO} = F_{REF} * M / R$ M = 11 bit R = 8 bit P = 5 bit (Odd/Even Divider)	Each output has three optional drive strengths to choose from. They are: <ul style="list-style-type: none"> <li>• Low: 4mA</li> <li>• Std: 8mA (default)</li> <li>• High: 16mA</li> </ul>	Most pins are multi-function I/Os and can be configured as: <ul style="list-style-type: none"> <li>• OEM – (Master OE controlling all outputs)</li> <li>• CSEL – (Device Configuration Switching)</li> <li>• PDB – (Power Down)</li> <li>• CLK[0:4] – (Output)</li> <li>• HiZ or Active Low disabled state</li> </ul>

**1.8V-3.3V PicoPLL™, 3-PLL, 200MHz, 5 Output Clock IC**

**FUNCTIONAL DESCRIPTION**

The PL613-05 is a highly featured, very flexible, advanced triple PLL design for high performance, low-power applications. The device accepts a low-cost fundamental crystal input of 10MHz to 40MHz or a reference clock input of 10MHz to 200MHz and is capable of producing 3 (SOP-8L) or 5 (MSOP-10L) distinct output frequencies up to 200MHz. All 3-PLLs are fully programmable, with a total of four, 5-bit Post VCO, Odd/Even (patent pending) ‘P-counter’ dividers with additional 1, 2, 4 or 8 ‘Post P-counter’ dividers to allow generating the most demanding frequencies easily. The outputs can be programmed to deliver the generated frequencies from the PLLs, or the reference input. Each bidirectional feature pin (I/O) on the PL613-05 incorporates a 60kΩ pull up resistor (10MΩ for PDB function) and can be configured to perform various functions. Usage of various design features of these products is mentioned in the following paragraphs.

**PLL Programming**

The three PLLs in PL613-05 are fully programmable. Each PLL is equipped with an 8-bit input frequency divider (R-Counter) and an 11-bit VCO frequency feedback loop (M-Counter) divider. The three PLL outputs are transferred to four 5-bit post VCO, Odd/Even (patent pending) dividers (P-Counter), as shown in the above diagrams. In addition, there are three optional (÷1, ÷2, ÷4 or ÷8) post P-Counter dividers, that can further divide the VCO frequencies. In general, the PLL output frequency is determined by the following formula

$$F_{OUT} = (F_{REF} * M) / (R * P)$$

For output calculations, please note that ‘P’ includes the ‘P’ counter bits plus the additional optional (÷1, ÷2, ÷4 or ÷8) dividers, if used.

**CLKx (Clock Outputs)**

There are a maximum of 3 (SOP-8L) or 5 (MSOP-10L) outputs available on the PL613-05. Clock output frequencies can be configured as follows:

CLK[0]

$$F_{VCO2} / P$$

CLK[1,2]

$$F_{VCOx} / (P * (1,2,4,8)) \text{ or } F_{REF} / (P * (1,2,4,8))$$

CLK[3]

$$F_{VCO2} / (P * (1,2,4,8)) \text{ or } F_{REF} / (P * (1,2,4,8))$$

CLK[4]

$$F_{VCO3} / P \text{ or } F_{REF} / P$$

Each output can be programmed with a 4mA, 8mA, or 16mA drive strength. The maximum output frequency is 200MHz @ 3.3V, 166MHz @ 2.5V or 110MHz @ 1.8V.

**OEM (Master Output Enable)**

One pin can be configured to be a single Master OE (OEM) input pin that controls all the outputs of the PL613-05. In addition the state of the disabled outputs can be programmed to float (Hi Z) or Active ‘0’. The OEM pin incorporates a 60kΩ pull up resistor for normal operating condition. The logic for OEM is shown below:

OEM Pin	OE Type (Programmable)	Osc	PLL	Output
0	0 (Default)	On	On	Hi Z
	1	On	On	Active ‘0’
1	Normal Operation (Default)			

Note: Typical enable time is 10ns.

**Power-Down Control (PDB)**

When activated, PDB ‘Disables all the PLLs, the oscillator circuitry, counters, and all other active circuitry. PDB activation disables all outputs and the IC consumes <10µA of power. The PDB input incorporates a 10MΩ pull up resistor for normal operating condition.

The PDB feature can be programmed to allow the output to float (Hi Z), or to operate in the ‘Active low’ mode. The logic for PDB is shown below:

PDB Pin	PDB Type Program	Osc	PLL	Output
0	0 (Default)	Off	Off	Hi Z
	1	Off	Off	Active ‘0’
1	Normal Operation (Default)			

Note: Typical enable time is <2ms.

## 1.8V-3.3V PicoPLL™, 3-PLL, 200MHz, 5 Output Clock IC

### On-The-Fly Configuration Switching (CSEL)

The PL613-05 can be programmed to allow switching between 2 different configurations, allowing for changes in the output frequency and other feature changes. Many applications (i.e. video/audio) can use the same design footprint, but allow for configuration switching, adhering to various standards. CSEL is used to make the switching selection. This pin incorporates a 60kΩ pull up resistor for normal operating condition. The logic for

configuration switching of the programmed parts is shown below:

CSEL	Programmed Configuration
0	0
1	1(Default)

Note: Typical enable time is 100μs.

### LAYOUT RECOMMENDATIONS



The following guidelines are to assist you with a performance optimized PCB design:

#### Signal Integrity and Termination Considerations

- Keep traces short!
- Trace = Inductor. With a capacitive load this equals ringing!
- Long trace = Transmission Line. Without proper termination this will cause reflections (looks like ringing).
- Design long traces (<1 inch) as "striplines" or "microstrips" with defined impedance.
- Match trace at one side to avoid reflections bouncing back and forth.

#### Decoupling and Power Supply Considerations

- Place decoupling capacitors as close as possible to the V<sub>DD</sub> pin(s) to limit noise from the power supply
- Multiple V<sub>DD</sub> pins should be decoupled separately for best performance.
- Addition of a ferrite bead in series with V<sub>DD</sub> can help prevent noise from other board sources
- Value of decoupling capacitor is frequency dependant. Typical values to use are 0.1μF for designs using frequencies < 50MHz and 0.01μF for designs using frequencies > 50MHz.

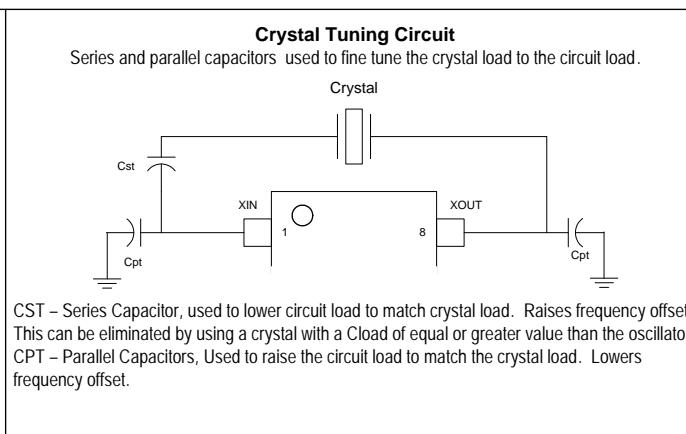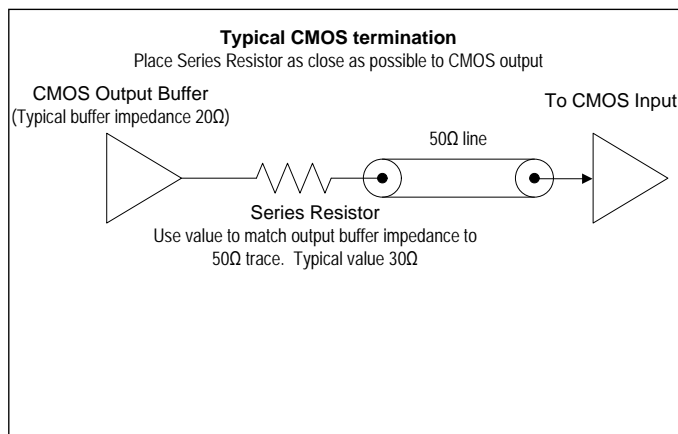

## 1.8V-3.3V PicoPLL™, 3-PLL, 200MHz, 5 Output Clock IC

### ELECTRICAL SPECIFICATIONS

#### ABSOLUTE MAXIMUM RATINGS

PARAMETERS	SYMBOL	MIN.	MAX.	UNITS
Supply Voltage Range	$V_{DD}$	-0.5	4.6	V
Input Voltage Range	$V_I$	-0.5	$V_{DD}+0.5$	V
Output Voltage Range	$V_O$	-0.5	$V_{DD}+0.5$	V
Soldering Temperature (Green package)			260	°C
Data Retention @ 85°C		10		Year
Storage Temperature	$T_S$	-65	150	°C
Ambient Operating Temperature*		-40	85	°C

Exposure of the device under conditions beyond the limits specified by Maximum Ratings for extended periods may cause permanent damage to the device and affect product reliability. These conditions represent a stress rating only, and functional operations of the device at these or any other conditions above the operational limits noted in this specification is not implied. \*Operating temperature is guaranteed by design. Parts are tested to commercial grade only.

#### AC SPECIFICATIONS

PARAMETERS	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Crystal Input Frequency (XIN)	Fundamental Crystal	10		40	MHz
Input (FIN) Frequency	@ $V_{DD} = 3.3V$	1		200	MHz
	@ $V_{DD} = 2.5V$			166	
	@ $V_{DD} = 1.8V$			110	
Input (FIN) Signal Amplitude	Internally AC coupled (High Frequency)	0.9		$V_{DD}$	V <sub>pp</sub>
Input (FIN) Signal Amplitude	Internally AC coupled (Low Frequency) 3.3V ≤ 50MHz, 2.5V ≤ 40MHz, 1.8V ≤ 15MHz	0.1		$V_{DD}$	V <sub>pp</sub>
Output Frequency	@ $V_{DD} = 3.3V$			200	MHz
	@ $V_{DD} = 2.5V$			166	
	@ $V_{DD} = 1.8V$			110	
Settling Time	At power-up (after $V_{DD}$ increases over 1.62V)			2	ms
Output Enable Time	OE Function; $T_a = 25^\circ C$ , 15pF Load			10	ns
	PDB Function; $T_a = 25^\circ C$ , 15pF Load			2	ms
VDD Sensitivity	Frequency vs. $V_{DD} \pm 10\%$	-2		2	ppm
Output Rise Time	15pF Load, 10/90% $V_{DD}$ , High Drive, 3.3V		1.2	1.7	ns
Output Fall Time	15pF Load, 90/10% $V_{DD}$ , High Drive, 3.3V		1.2	1.7	ns
Duty Cycle	PLL Enabled, @ $V_{DD} / 2$ , High Drive	45	50	55	%
Period Jitter, Pk-to-Pk* (10,000 samples)	Configuration Dependant, with capacitive decoupling between $V_{DD}$ and GND.		300		ps

\* Note: Jitter performance depends on the programming parameters.

**1.8V-3.3V PicoPLL™, 3-PLL, 200MHz, 5 Output Clock IC**
**DC SPECIFICATIONS**

PARAMETERS	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS
Supply Current, Dynamic, Loaded CMOS Outputs	$I_{DD}$	All outputs @ 20MHz 10pF Load		15	21	mA
Supply Current, Dynamic, Loaded CMOS Outputs	$I_{DD}$	All outputs @ 20MHz 10pF Load		11	16	mA
Supply Current, Dynamic, Loaded CMOS Outputs	$I_{DD}$	All outputs @ 20MHz 10pF Load		8.5	11	mA
Supply Current	$I_{DD}$	When PDB=0 All outputs @ 20MHz 10pF Load, $V_{DD} = 3.3V$			<10	$\mu A$
Operating Voltage	$V_{DD}$	3.3V Operation	2.97	3.3	3.63	V
		2.5V Operation	2.25	2.5	2.75	
		1.8V Operation	1.62	1.8	1.98	
Output Low Voltage	$V_{OL}$	$I_{OL} = +4mA$ Std Drive			0.4	V
Output High Voltage	$V_{OH}$	$I_{OH} = -4mA$ Std Drive	$V_{DD} - 0.4$			V
Output Current, Low Drive	$I_{OSD}$	$V_{OL} = 0.4V, V_{OH} = 2.4V$	4			mA
Output Current, Std Drive	$I_{OSD}$	$V_{OL} = 0.4V, V_{OH} = 2.4V$	8			mA
Output Current, High Drive	$I_{OHD}$	$V_{OL} = 0.4V, V_{OH} = 2.4V$	16			mA

**CRYSTAL SPECIFICATIONS**


PARAMETERS		SYMBOL	MIN	TYP	MAX	UNITS
Fundamental Crystal Resonator Frequency		$F_{XIN}$	10		40	MHz
Crystal Loading Rating		$C_{L(xtal)}$		15		pF
Operating Drive Level				0.1	2	mW
Metal Can Crystal	Shunt Capacitance	$C_0$			5.5	pF
	ESR Max	ESR			40	$\Omega$
Small SMD Crystal	Shunt Capacitance	$C_0$			2.5	pF
	ESR Max	ESR			60	$\Omega$

**1.8V-3.3V PicoPLL™, 3-PLL, 200MHz, 5 Output Clock IC**

**PACKAGE DRAWINGS (GREEN PACKAGE COMPLIANT)**


**MSOP-10L**

Symbol	Dimension in MM	
	Min.	Max.
A	0.86	1.06
A1	0.05	0.15
A2	0.81	0.91
b	0.17	0.25
C	0.1	0.2
D	3.00 BSC	
E	3.00 BSC	
H	--	5.08
L	0.43	0.63
e	0.50 BSC	

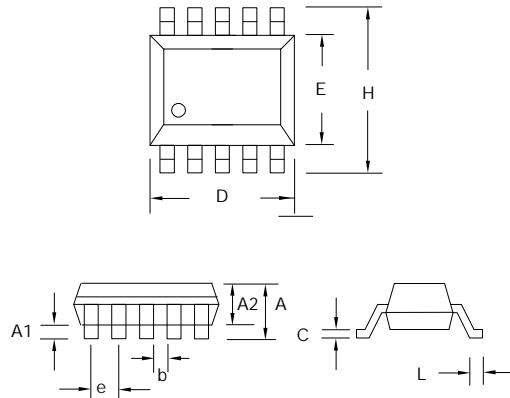

**SOP-8L**

Symbol	Dimension in MM	
	Min.	Max.
A	1.35	1.75
A1	0.10	0.25
A2	1.25	1.50
b	0.33	0.53
C	0.19	0.27
D	4.80	5.00
E	3.80	4.00
H	5.80	6.20
L	0.40	0.89
e	1.27 BSC	

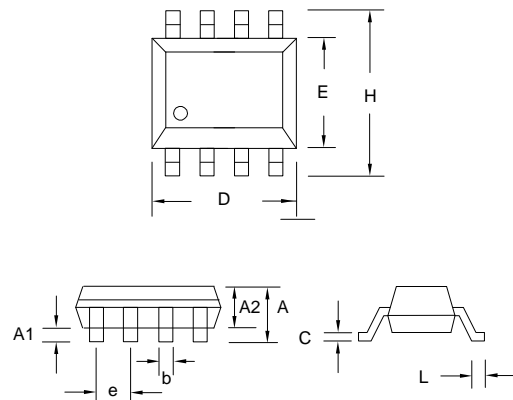

**1.8V-3.3V PicoPLL™, 3-PLL, 200MHz, 5 Output Clock IC**

**ORDERING INFORMATION (GREEN PACKAGE COMPLIANT)**


**For part ordering, please contact our Sales Department:**

47745 Fremont Blvd., Fremont, CA 94538, USA

Tel: (510) 492-0990 Fax: (510) 492-0991

**PART NUMBER**

The order number for this device is a combination of the following:  
Part number, Package type and Operating temperature range

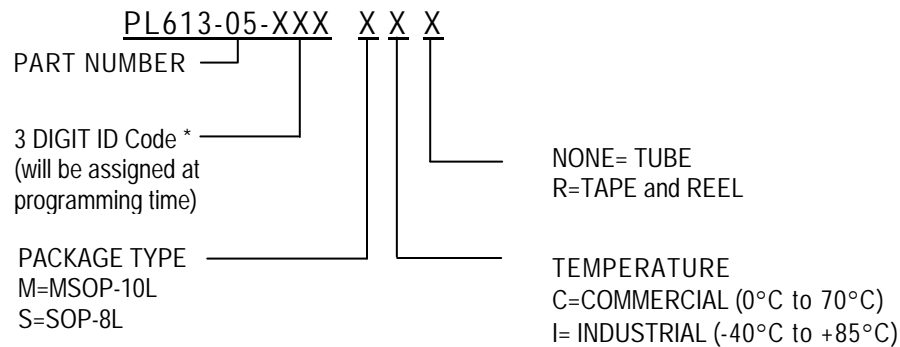

\* PhaseLink will assign a unique 3-digit ID code for each approved programmed part number.

Part Number/Order Number	Marking†	Package Option
PL613-05-XXXMC	H3XXX LLL(I)	10-Pin MSOP (Tube)
PL613-05-XXXMC-R	H3XXX LLL(I)	10-Pin MSOP (Tape and Reel)
PL613-05-XXXSC	P613-05 XXX(I) LLLLL	8-Pin SOP (Tube)
PL613-05-XXXSC-R	P613-05 XXX(I) LLLLL	8-Pin SOP (Tape and Reel)

† Marking Notes :

- 1) The "I" after the three digit programming code will be marked for Industrial Temperature grade products only. Commercial grade products will not have a character in this position.
- 2) LLLLL represents the production lot number

PhaseLink Corporation, reserves the right to make changes in its products or specifications, or both at any time without notice. The information furnished by Phaselink is believed to be accurate and reliable. However, PhaseLink makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon this product.

LIFE SUPPORT POLICY: PhaseLink's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President of PhaseLink Corporation.

Solder reflow profile available at [www.phaselink.com/OA/solderingGreen.pdf](http://www.phaselink.com/OA/solderingGreen.pdf)