


GIGABIT (10/100/1000 BASE-T) QUAD- AND DUAL-TRANSFORMER MODULES & UNFILTERED CONNECTORS

Designed to Support PoE, Auto MDIX

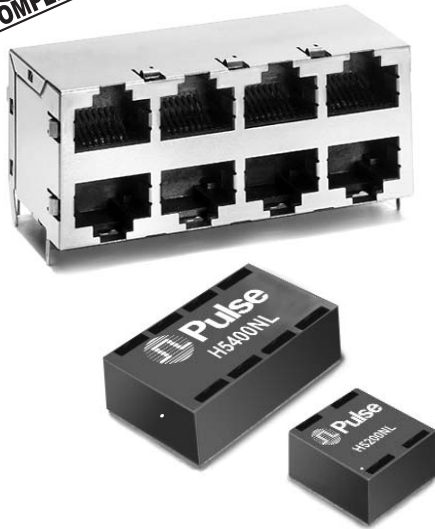

- World's smallest Gigabit Quad- and Dual-isolation transformer modules
- All pairs are symmetrical and balanced
- Reliable surface mount ball grid array
- Compact footprint, reduced board space
- Designed to fit behind 2x2 connectors
- RoHS-6 peak reflow temperature rating 245°C

Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

RoHS-6 Compliant Part Number	Number of Ports	Insertion Loss (dB MAX)	Return Loss (dB MIN)						Differential to Common Mode Rejection (dB MIN)			Crosstalk (dB MIN)			Hipot (Vrms)
			1-100 MHz	1-30 MHz	40 MHz	50 MHz	60-80 MHz	100 MHz	30 MHz	60 MHz	100 MHz	30 MHz	60 MHz	100 MHz	
H5200NL	2	1	-18	-18	-16	-12	-10	-43	-37	-33	-43	-37	-33	1500	
H5201NL	2	1	-18	-18	-16	-12	-10	-43	-37	-33	-43	-37	-33	1500	
H5400NL	4	1	-18	-18	-16	-12	-10	-43	-37	-33	-43	-37	-33	1500	
H5401NL	4	1	-18	-18	-16	-12	-10	-43	-37	-33	-43	-37	-33	1500	
HX5200NL	2	1	-18	-18	-16	-12	-10	-43	-37	-33	-43	-37	-33	1500	
HX5201NL	2	1	-18	-18	-16	-12	-10	-43	-37	-33	-43	-37	-33	1500	
HX5400NL	4	1	-18	-18	-16	-12	-10	-43	-37	-33	-43	-37	-33	1500	
HX5401NL	4	1	-18	-18	-16	-12	-10	-43	-37	-33	-43	-37	-33	1500	

1. MSL = Moisture Sensitivity Level: 1
2. Second level mechanical shock test, mounted to 4 layer FR-4 PCB (passed 500g in 5-axis)
3. RoHS-6: Product does not contain 5 out of the 6 banned substances specified in the RoHS directive. Some internal connections may contain lead in high-temperature solder (solder alloys containing more than 85% lead).
4. Parts come with/without lead.
5. HX = operating temperature -40 to +85°C (extended temperature)

Connector Mechanical Specifications--Operating Temperature -40°C to 85°C

RoHS-6	Mounting, Tab Position	Number of Ports	Package Dimensions L/W/H (mm)	Solder Temperature (35 seconds)	LED Option	Plating
E5908-25A1J5-L	THT, Tab Down	1x2	31.24 / 21.35 / 13.6	230°C - 250°C	No LED's	Gold Plating Over Nickel
E5908-25C345-L	THT, Tab Down	1x4	59.18 / 21.35 / 13.6	230°C - 250°C	No LED's	Gold Plating Over Nickel
E5908-57A132-L	THT, Tab Up/Down	2x2	25.35 / 31.24 / 25.3	230°C - 250°C	No LED's	Gold Plating Over Nickel
E5908-5VC144-L	THT, Tab Up/Down	2x4	59.18 / 28.35 / 25.3	230°C - 250°C	No LED's	Gold Plating Over Nickel



GIGABIT (10/100/1000 BASE-T) QUAD- AND DUAL-TRANSFORMER MODULES & UNFILTERED CONNECTORS

Designed to Support PoE, Auto MDIX





Mechanicals

H5400NL, H5401NL, HX5400NL, HX5401NL

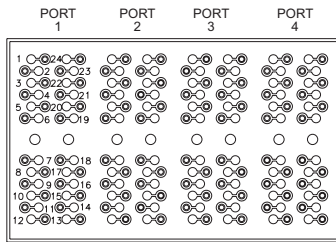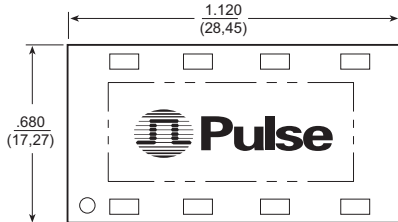

PIN NUMBERING
BOTTOM VIEW

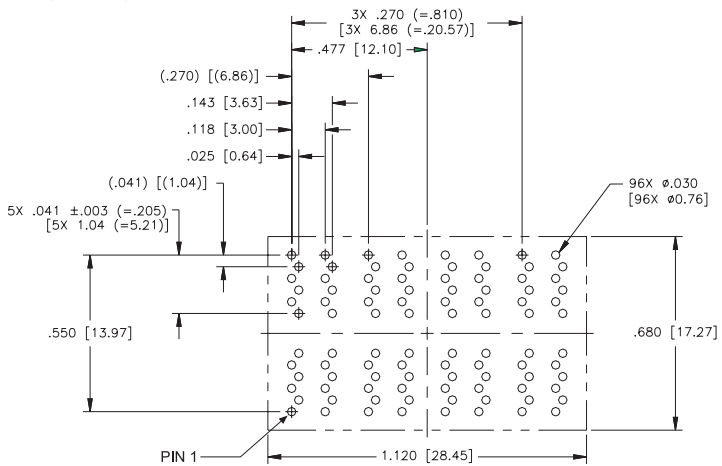
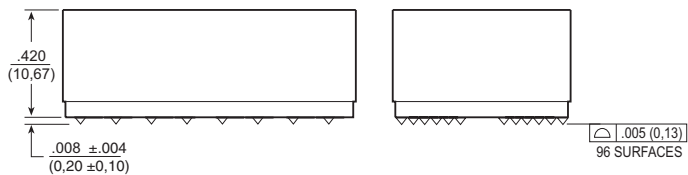


SUGGESTED FOOTPRINT
COMPONENT/TOP VIEW



Weight10 grams
Tray300

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

H5200NL, H5201NL, HX5200NL, HX5201NL



PIN NUMBERING
BOTTOM VIEW

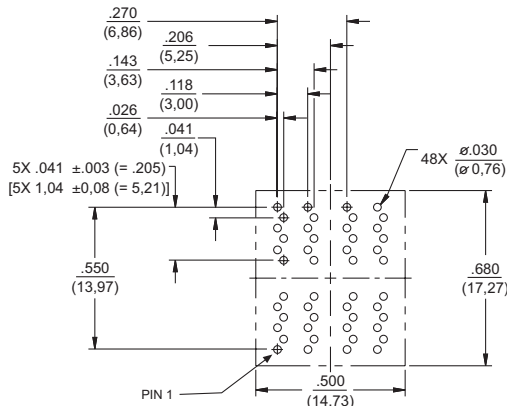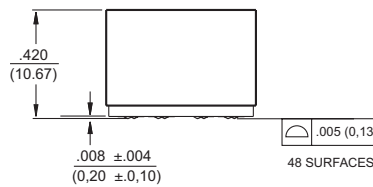

SUGGESTED FOOTPRINT
COMPONENT/TOP VIEW

Weight5 grams
Tray600

Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$


GIGABIT (10/100/1000 BASE-T) QUAD- AND DUAL-TRANSFORMER MODULES & UNFILTERED CONNECTORS

Designed to Support PoE, Auto MDIX




Mechanicals (continued)

E5908-25A1J45-L

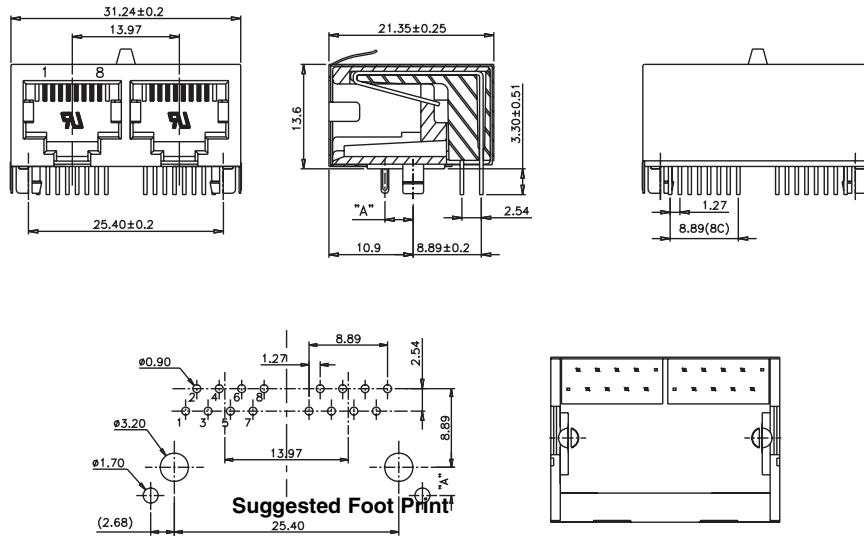

E5908-25C345-L

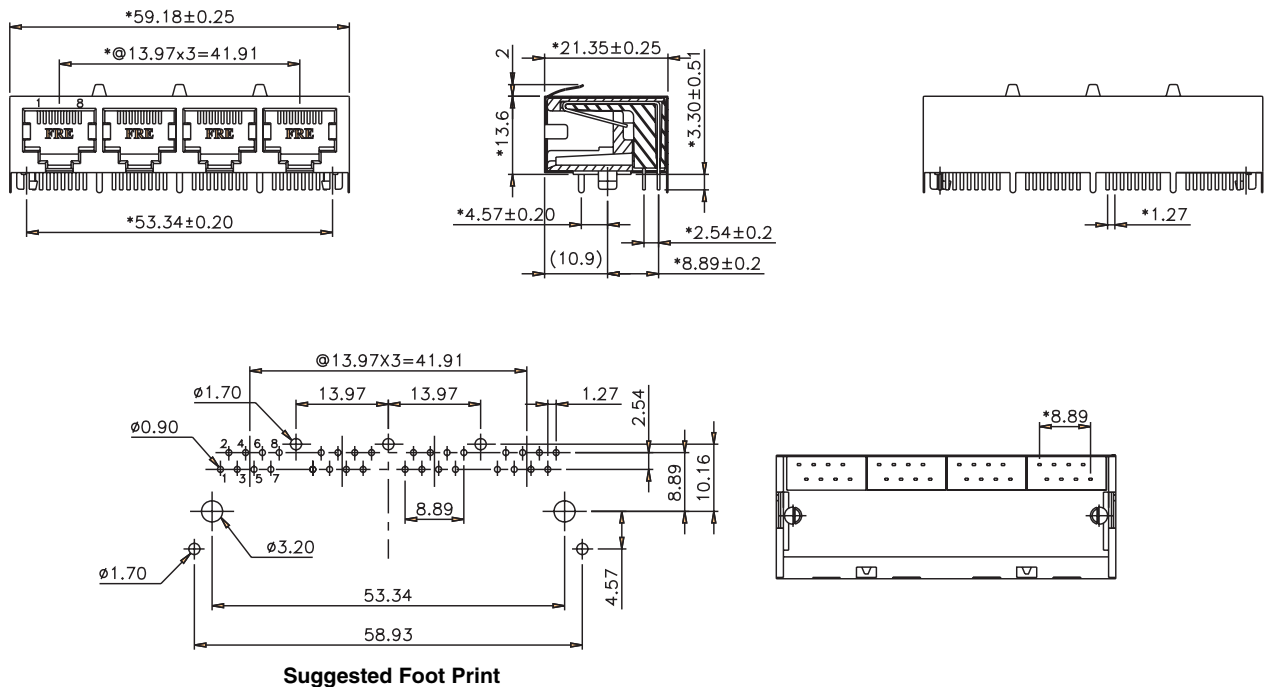


GIGABIT (10/100/1000 BASE-T) QUAD- AND DUAL-TRANSFORMER MODULES & UNFILTERED CONNECTORS

Designed to Support PoE, Auto MDIX




Mechanicals (continued)

E5908-5VC144-L

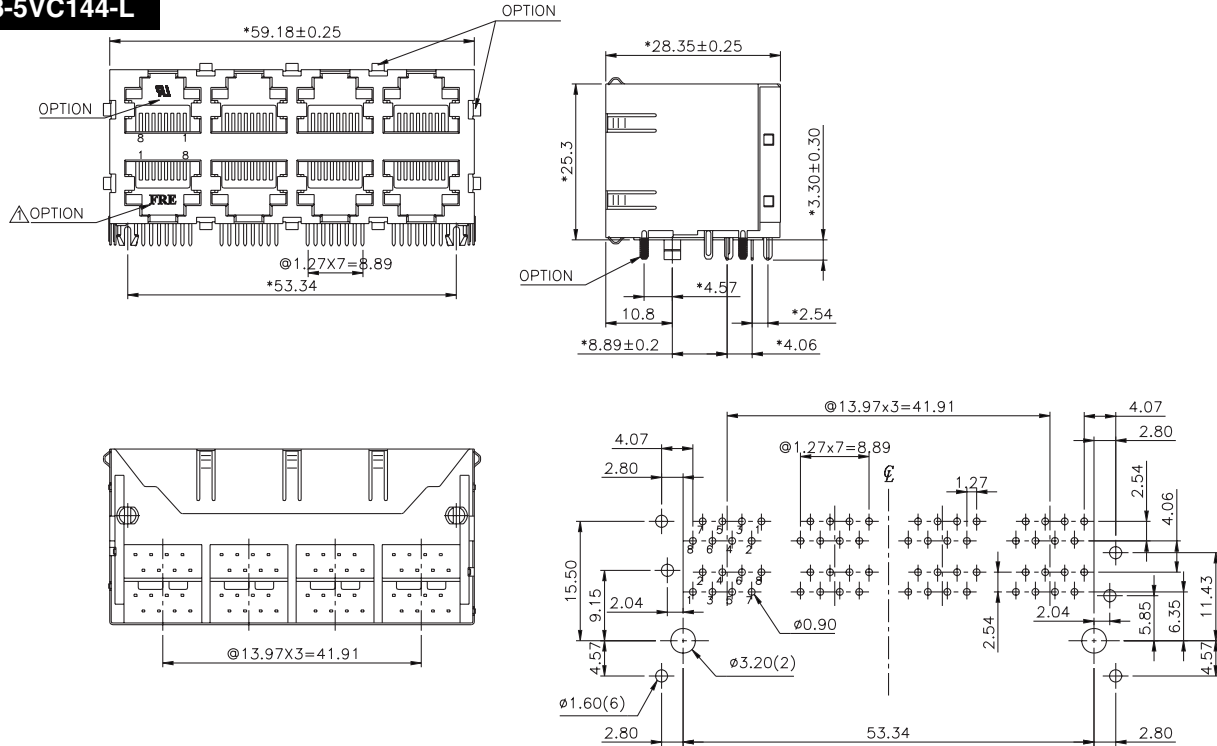

Suggested Foot Print

ES908-57A132-L

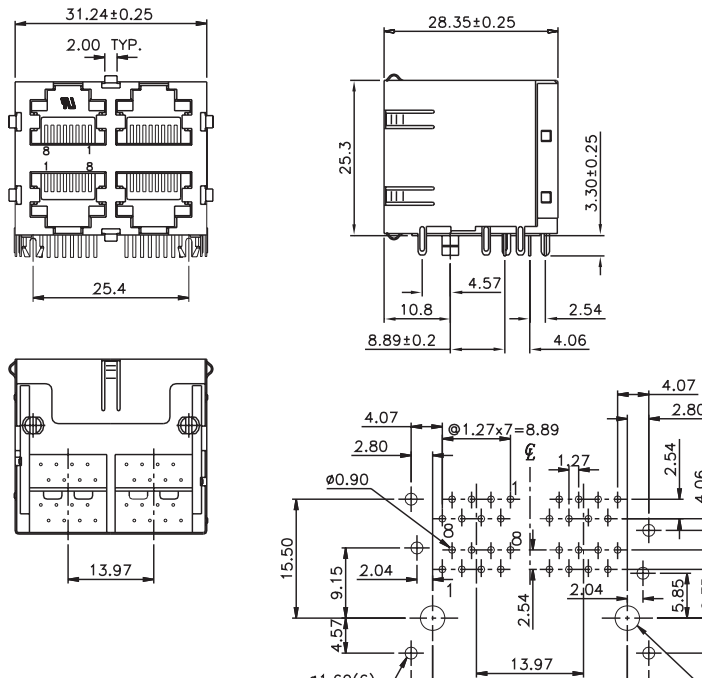


GIGABIT (10/100/1000 BASE-T) QUAD- AND DUAL-TRANSFORMER MODULES & UNFILTERED CONNECTORS

Designed to Support PoE, Auto MDIX



Schematics

H5400NL, HX5400NL

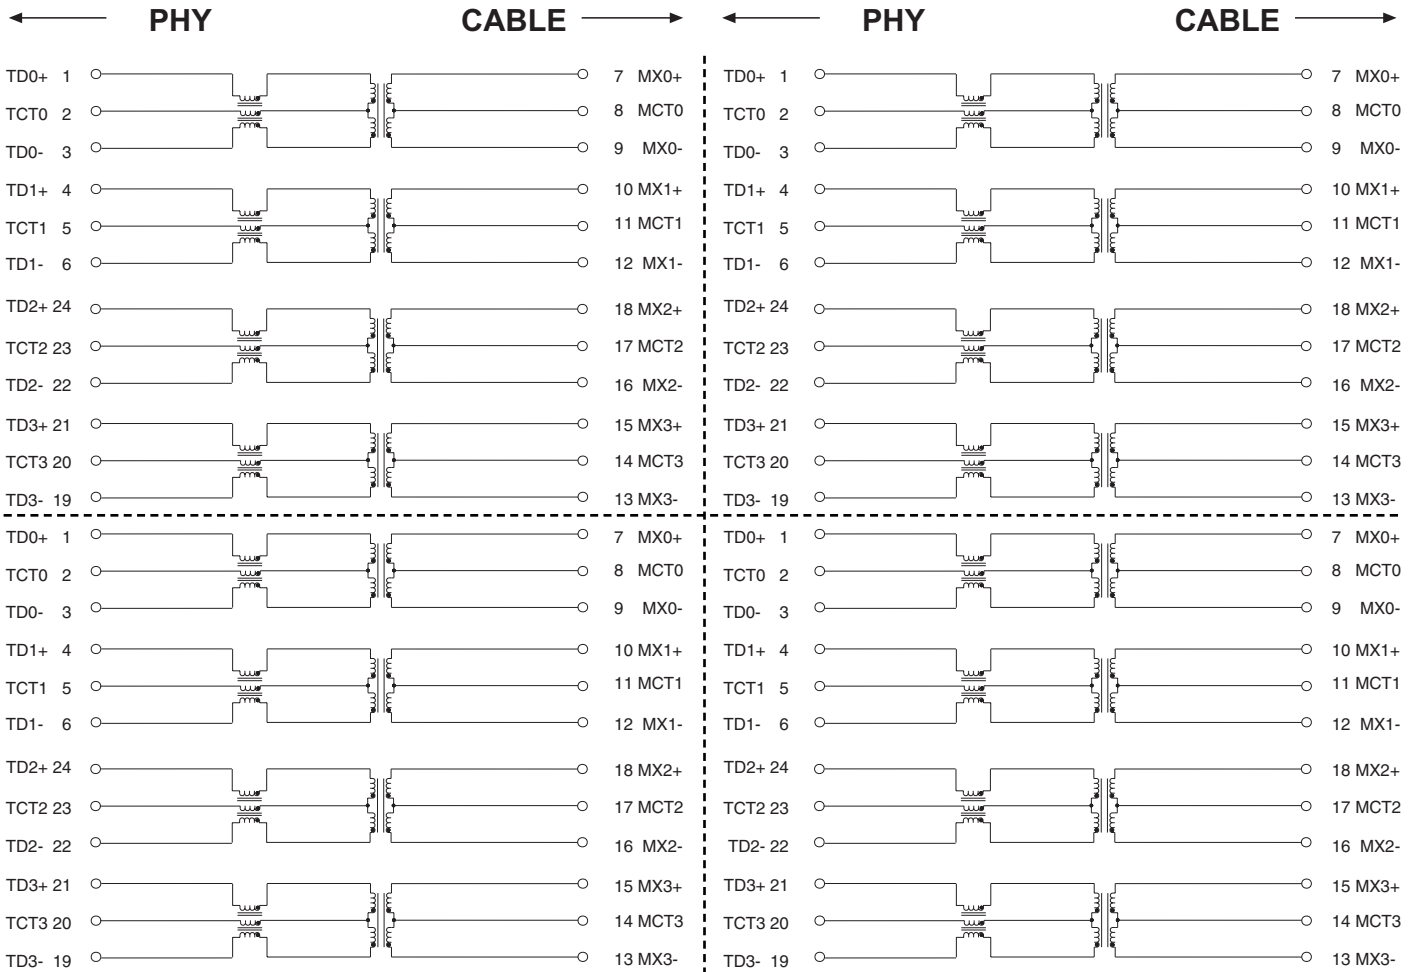

Schematics for quad ports


GIGABIT (10/100/1000 BASE-T) QUAD- AND DUAL-TRANSFORMER MODULES & UNFILTERED CONNECTORS

Designed to Support PoE, Auto MDIX



Schematics (continued)

H5401NL, HX5401NL

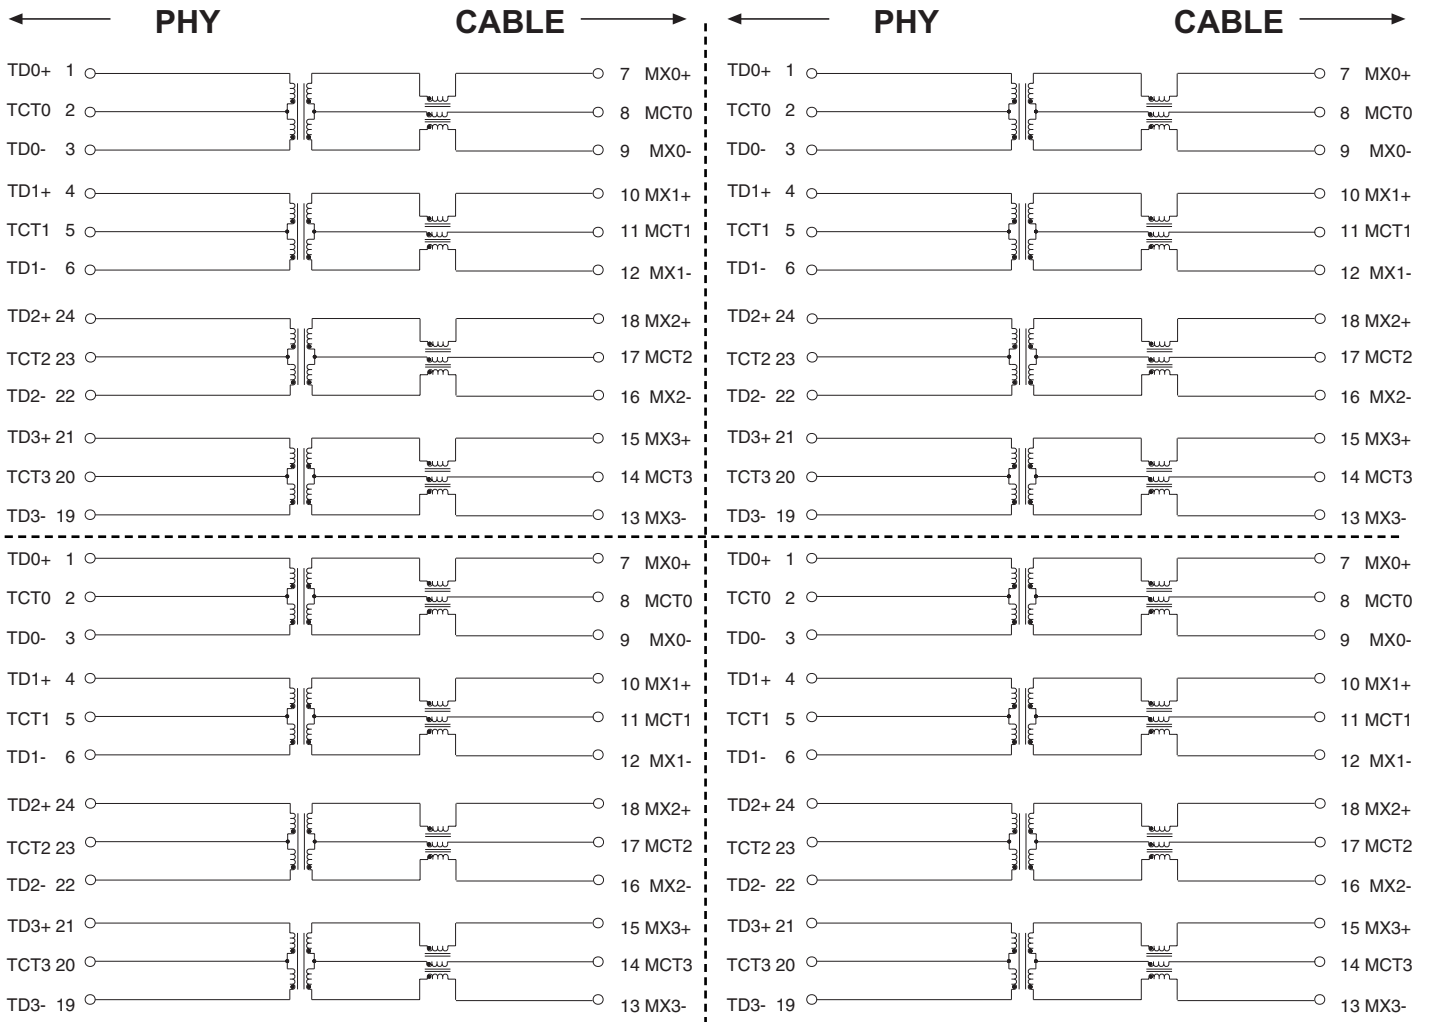

Schematics for quad ports


GIGABIT (10/100/1000 BASE-T) QUAD- AND DUAL-TRANSFORMER MODULES & UNFILTERED CONNECTORS

Designed to Support PoE, Auto MDIX




Schematics (continued)

H5200NL, HX5200NL

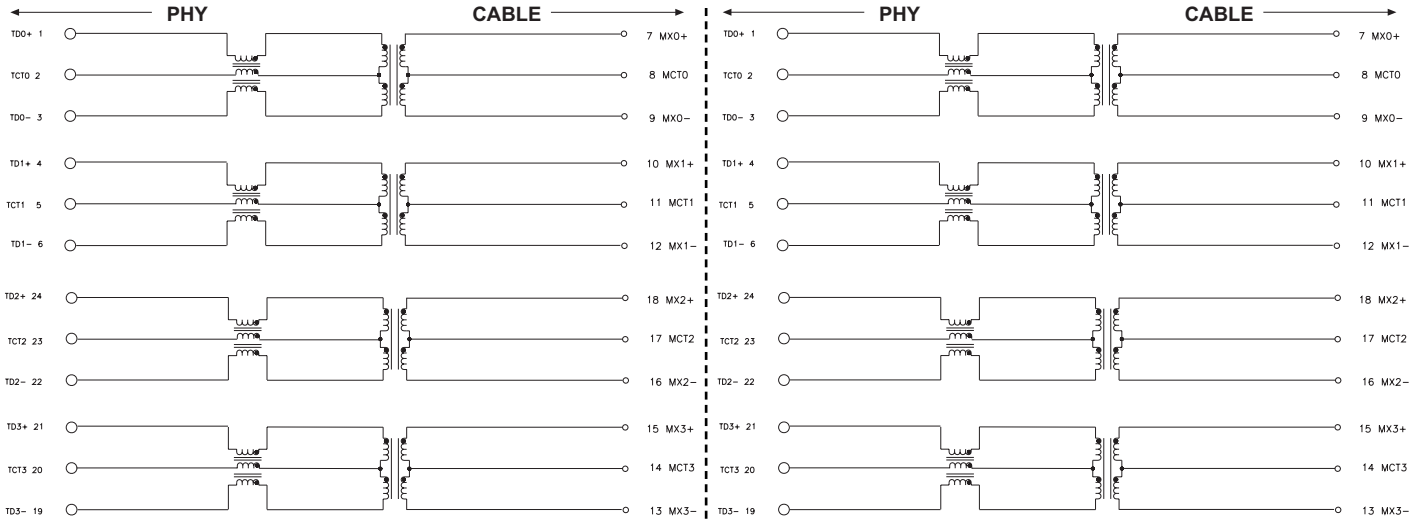

Schematics for dual ports

H5201NL, HX5201NL

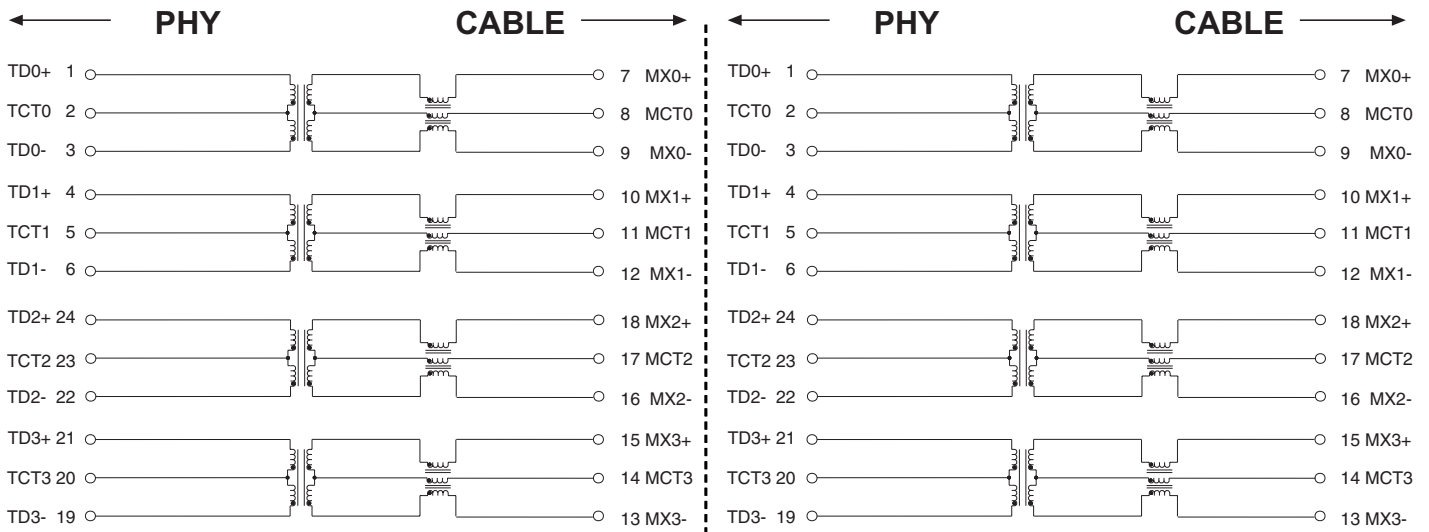

Schematics for dual ports


GIGABIT (10/100/1000 BASE-T) QUAD- AND DUAL-TRANSFORMER MODULES & UNFILTERED CONNECTORS

Designed to Support PoE, Auto MDIX



Application Circuit

Typical Gigabit Circuit

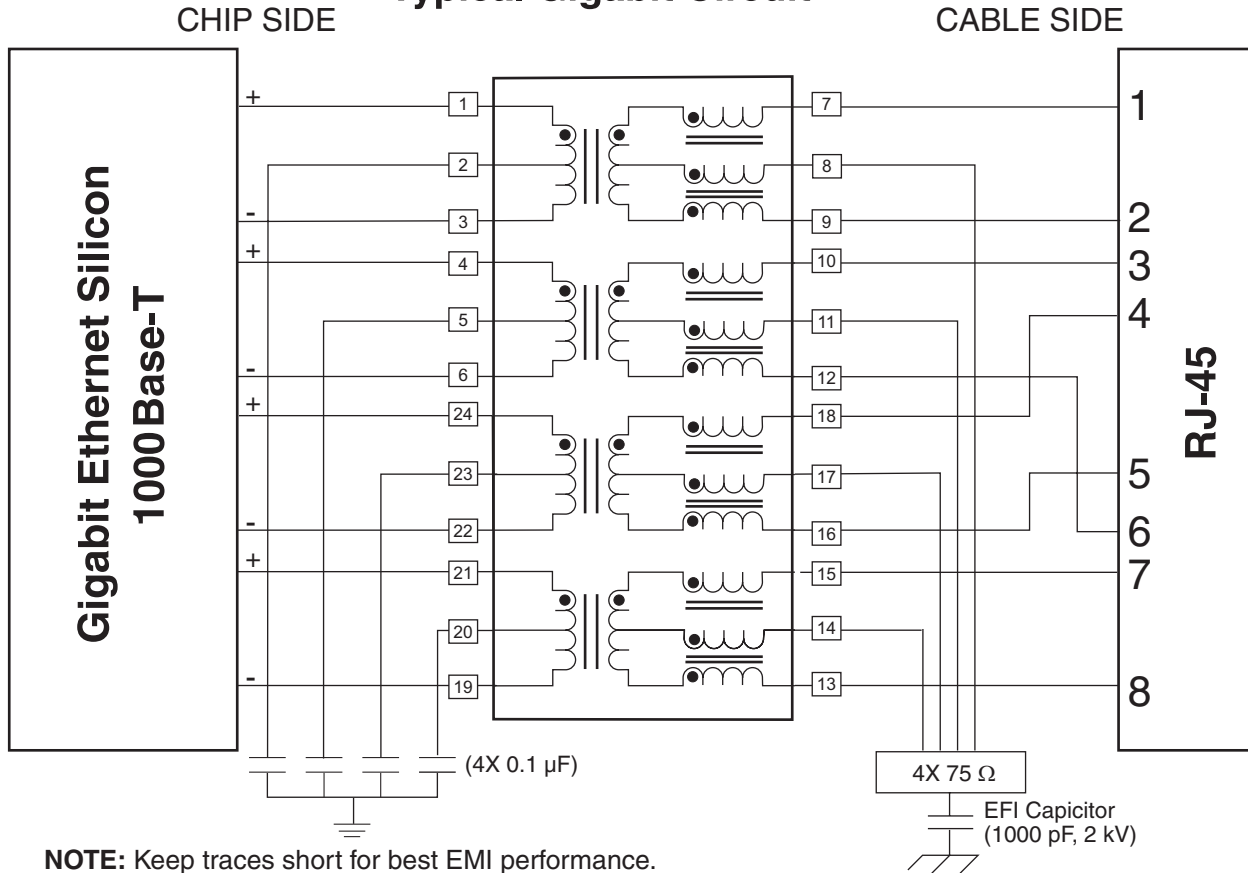

NOTE: Keep traces short for best EMI performance.

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
 San Diego, CA 92128
 U.S.A.

www.pulseeng.com

Tel: 858 674 8100
 Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
 D-71083 Herrenberg
 Germany

Tel: 49 7032 7806
 Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen
 Tech-Innovation International
 Tenth Kejinan Rd.
 High-Tech Industrial Park
 Nanshan District, Shenzhen
 China

Tel: 86 755 33966678
 Fax: 86 755 33966700

Pulse North China

Room 1503
 XinYin Building
 No. 888 YiShan Rd.
 Shanghai 200233
 China

Tel: 86 21 54643211/2
 Fax: 86 21 54643210

Pulse South Asia

150 Kampong Ampat
 #07-01/02
 KA Centre
 Singapore 368324

Tel: 65 6287 8998
 Fax: 65 6280 0080

Pulse North Asia

No. 26
 Kao Ching Rd.
 Yang Mei Chen
 Taoyuan Hsien
 Taiwan, R. O. C.

Tel: 886 3 4641811
 Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2007. Pulse Engineering, Inc. All rights reserved.