


aTCA-6100

Dual Quad-Core Intel® Xeon® L5518 Processor AdvancedTCA® Processor Blade with 10GbE Fabric Interface

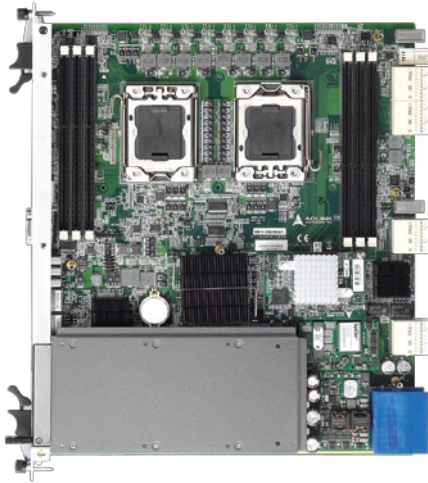

Features

- Two Quad-Core Intel® Xeon® L5518 processors
- Six memory sockets support DDR3-1333 REG/ECC up to 48 GB maximum capacity
- Intel® 82599 10GbE controller provides two 10GBASE-KX4 ports on Fabric Interface
- Intel® Hyper-Threading Technology support for multi-threaded software applications
- Single AMC.0 Mid-size bay

Intel® Ethernet

Specifications

CPU / Chipset / Memory

CPU	Two Intel® Xeon® L5518 (4C/8T) 2.13GHz, QPI 5.86 GT/s, 8 MB L2 Cache (LGA1366)
Chipset	Intel® 5520/ICH10R chipset
Memory	Six DDR3-1333 240-pin RDIMM sockets, up to 48 GB

BIOS

Chip	AMIBIOS®8 on SPI flash memory
Features	Intel® PXE pre-boot Remote Console

I/O Interfaces

Graphics	ATI ES1000 with 64 MB VRAM, up to UXGA 1600 x 1200 resolution
AdvancedMC	One AMC.0 Mid-size bay: AMC.1 Type 4, AMC.2 E2 / Type 4 to Fabric, AMC.3 S2
Ethernet	Dual 10/100/1000BASE-T Base Interface channels Dual 10GBASE-KX4 Fabric Interface channels Dual 10/100/1000BASE-T Egress ports
Storage	On-board 2.5" SATA II HDD On-board bootable 4 GB USB NAND flash Dual AMC.3 SATA-II ports (Port2) Dual AMC.3 SAS ports (Port3)
USB	Three USB 2.0 ports on front panel
Front Panel I/O	AMC, VGA, USB1/2/3, LAN1/2, COM1

PICMG Standards

AdvancedTCA	PICMG® 3.0 R2.0 ECN002 PICMG® 3.1 Ethernet Over PICMG® 3.0 R1.0 , Option 1/9
AdvancedMC	PICMG® AMC.0: AdvancedMC™ Card Specification R2.0 PICMG® AMC.1: PCI Express and Advanced Switching R1.0 PICMG® AMC.2: Gigabit Ethernet R1.0 PICMG® AMC.3: Storage Interfaces R1.0

Other Features

Operating System	Windows® Server 2008, Windows® Server 2003, Red Hat Enterprise Linux 5.3
------------------	--

Mechanical and Environmental

Form Factor	PICMG® 3.0 R2.0 ECN002 AdvancedTCA®
Dimensions	322.25mm x 280mm x 6HP (L x W x H)
Weight	4.1 kg / 9 lbs
Operating Temp.	0°C to 50°C
Storage Temp.	-40°C to 70°C
Humidity	5% to 95%, non-condensed
Shock	20G peak-to-peak, 11ms duration, non-operation
Vibration	Non-operation: 1.88Grms, 5-500Hz each axis Operation: 0.5Grms, 5-500Hz each axis
Power Consumption	200W
Certification	FCC, CE, CUL, NEBS Level 3 (design)

Ordering Information

Modules

Model Number	Description/Configuration
aTCA-6100/D5518/M4G/250	aTCA-6100 AdvancedTCA processor blade with dual L5518 QC 2.13GHz Xeon, DDR3 RDIMM 2GBx2, 250GB SATA HDD
aTCA-6100/D5518/M8G/250	aTCA-6100 AdvancedTCA processor blade with dual L5518 QC 2.13GHz Xeon, DDR3 RDIMM 2GBx4, 250GB SATA HDD
aTCA-6100/D5518/M12G/250	aTCA-6100 AdvancedTCA processor blade with dual L5518 QC 2.13GHz Xeon, DDR3 RDIMM 2GBx6, 250GB SATA HDD
aTCA-6100A/D5518/M4G	aTCA-6100 AdvancedTCA processor blade with dual L5518 QC 2.13GHz Xeon, DDR3 RDIMM 2GBx2, with AMC bay
aTCA-6100A/D5518/M8G	aTCA-6100 AdvancedTCA processor blade with dual L5518 QC 2.13GHz Xeon, DDR3 RDIMM 2GBx4, with AMC bay
aTCA-6100A/D5518/M12G	aTCA-6100 AdvancedTCA processor blade with dual L5518 QC 2.13GHz Xeon, DDR3 RDIMM 2GBx6, with AMC bay
aTCA-R6900	Rear Transition Module with SFP GbE x2, USB x2, SAS/ SATA HDD bay x2, COM x1

